


Checkpoints using ScriptArea's

1. make a ScriptArea large enough for the player to walk through.

I named mine **"ScriptArea_1"**

[5tz860.jpg](#)

2. create a PlayerStartArea this time I name mine **"PlayerStartArea_1"**

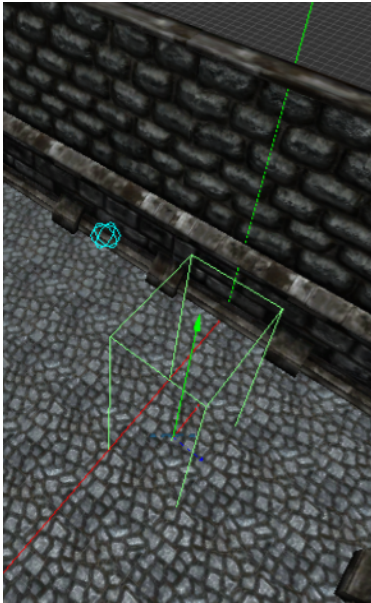

as for the script:

```
void OnStart()
{
AddEntityCollideCallback("Player", "ScriptArea_1", "Restart", true, 1);
}

void Restart(string &in asParent, string &in asChild, int alState)
{
Checkpoint ("FirstCheckpoint", "PlayerStartArea_1", "Happening", "DeathCategory", "Deathtext");
}

void Happening(string &in asName, int alCount)
{
/Stuff you want to happen after you die/
}
```

and as for the .LANG file

```
<LANGUAGE>
<CATEGORY Name="DeathCategory">
<Entry Name="Deathtext">Text you want in the black screen after you die </Entry>
</CATEGORY>
</LANGUAGE>
```

Now if you walk through the ScriptArea and die, you respawn at the PlayerStartArea you created.

From:
<https://wiki.frictionalgames.com/> - **Frictional Game Wiki**

Permanent link:
https://wiki.frictionalgames.com/hpl2/tutorials/scripting/checkpoints_using_scriptarea_s?rev=1347792695

Last update: **2012/09/16 11:51**

